

SYSTEM FEATURES AND BENEFITS

An anchored sports floor system providing adjustable performance levels, consisting in general of a vapor barrier, pre-manufactured subfloor panels adjusted as specified, anti-squeak collared steel anchors, resilient Rezill pads, maple flooring, sanding, sealers, finishes, game lines, and wall base.



- ① Heavy Duty concrete anchors with Anti-Squeak Collar
- ② Pre-manufactured subfloor assemblies
- ③ Resilient Rezill Pads

SPECIFICATIONS

MANUFACTURING



SYSTEM TYPE

Fixed Resilient

ANCHORAGE

Singular Pinned
(Design Group 3)

**SUBFLOOR
CONSTRUCTION**

Sleeper Panel

RESILIENCE

Rezill Pads

**RECYCLED
CONTRIBUTION**



Alliance Subfloor System includes components with recycled content

SLAB DEPRESSION

25/32" (20 mm) flooring - 2 1/4" (57 mm)
33/32" (26 mm) flooring - 2 1/2" (64 mm)

PERFORMANCE STATUS

Options available to meet or exceed all requirements of DIN 18032, part 2, DIN 18032, part 2, 2001, EN14904, ASTM F2772 and MFMA PUR

TESTING LABORATORY



United States Sports Surfacing Laboratory

CERTIFIED TESTING



Laboratory test equipment calibrated and certified through the ISSS

GREEN STATUS


Managed forests, certification available

**ENVIRONMENTAL
PRODUCT DECLARATION**




The first sports floor manufacturer to publish UL certified product-specific environmental performance in compliance with LEED V.4

WALL BASE DETAIL

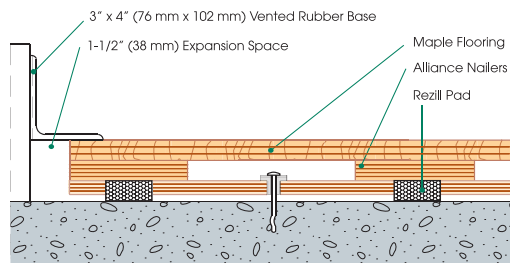

THRESHOLD DETAIL (optional accessory)

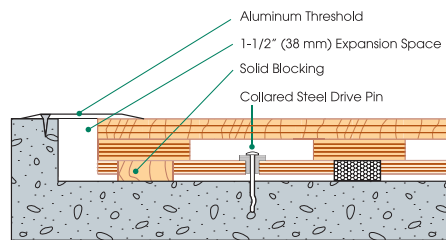

EQUIPMENT DETAIL (optional accessory)



ENDORSED
BY THESE
LEADERS
IN SPORT

