

F L O A T I N G S Y S T E M

SYSTEM FEATURES AND BENEFITS

Floating sports floor system providing shock absorption, consisting in general of a vapor barrier, PVC pads, softwood nailers, maple flooring, sanding, sealers, finishes, game line and wall base.



- ① 3/8" (10 mm) Duracushion PVC resilient pads
- ② Nominal 2" x 3" (38 mm x 64 mm) Softwood Sleeper

SPECIFICATIONS

MANUFACTURING

ISO 9001:2008
CERTIFIED
ISO 14001:2004
CERTIFIED

SYSTEM TYPE

Floating System

ANCHORAGE

No concrete attachment

SUBFLOOR CONSTRUCTION

Sleeper

RESILIENCE

PVC Pads

SLAB DEPRESSION

3/8" (10 mm) pad:
25/32" (20 mm) flooring - 2 5/8" (67 mm)
33/32" (26 mm) flooring - 2 7/8" (73 mm)

5/8" (16 mm) pad:
25/32" (20 mm) flooring - 2 7/8" (73 mm)
33/32" (26 mm) flooring - 3 1/8" (79 mm)

TESTING LABORATORY

United States Sports
Surfacing Laboratory



CERTIFIED TESTING

Laboratory test equipment
calibrated and certified
through the ISSS



GREEN STATUS

Managed forests,
certification available




ENVIRONMENTAL PRODUCT DECLARATION


The first sports floor manufacturer to
publish UL certified product-specific
environmental performance in
compliance with LEED V.4




WALL BASE DETAIL

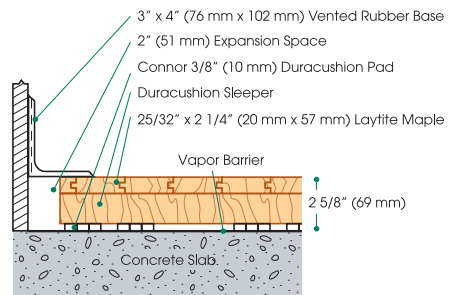

THRESHOLD DETAIL (optional accessory)

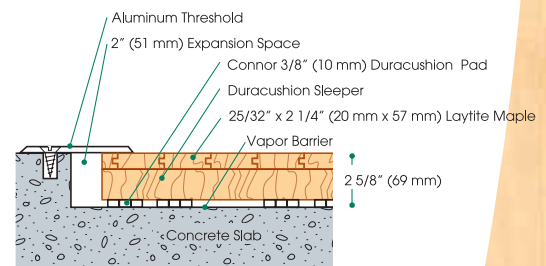

EQUIPMENT DETAIL (optional accessory)

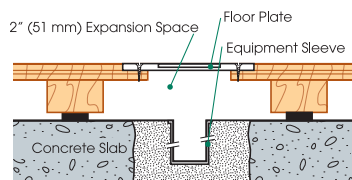

ENDORSED
BY THESE
LEADERS
IN SPORT

